


Berco[™]
THE HEART OF YOUR HOME

TECHNICAL SPECIFICATION

Materials & Construction.

Every material named. Every part you can put on a schedule.

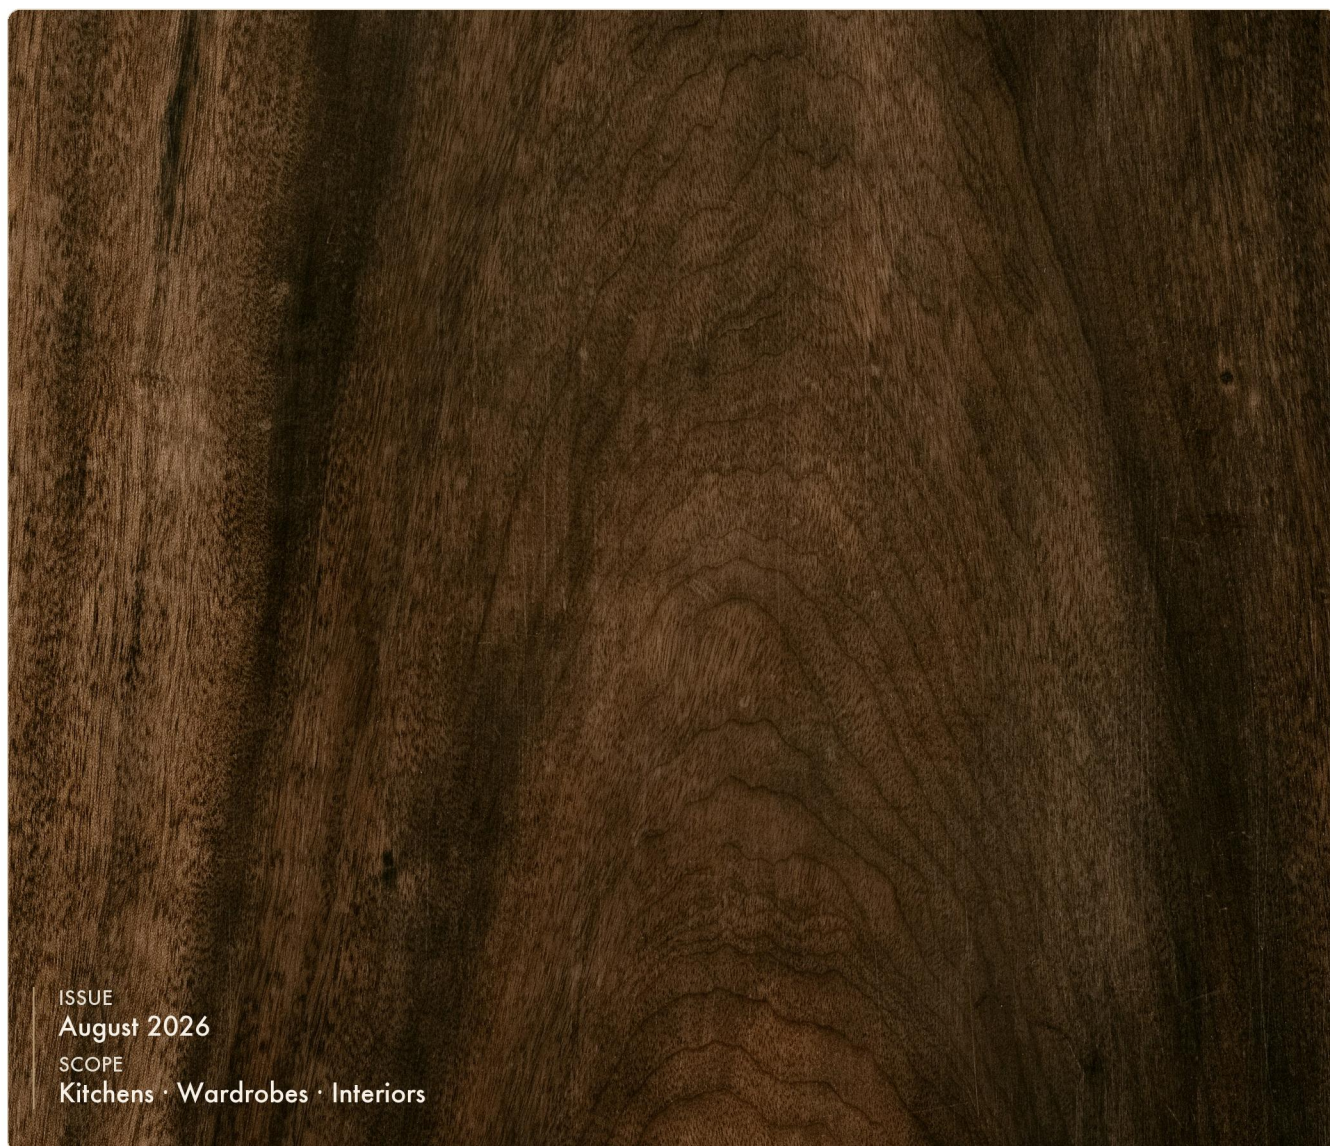

ISSUE
August 2026
SCOPE
Kitchens · Wardrobes · Interiors

FOR ARCHITECTS & DESIGNERS

THE HEART OF YOUR HOME

HOW TO READ THIS

Named, not implied.

This specifies what a Berco kitchen or wardrobe is actually made of – the board under the finish, the way an edge is sealed, the hardware that carries the load, and the lines it is cut on. Every material is named, so you can schedule it and check it rather than take it on trust.

Where a figure depends on the order – an emission grade, an edge, a hardware model – we quote the grade the order confirms, not the best case. We say moisture-resistant, not waterproof; heat-resistant, not heatproof. The intent is a specification you can hold us to.

The specification is the promise.


CONTENTS

- 01 Carcase & board
- 02 Door fronts
- 03 Edging
- 04 Countertops
- 05 Hardware
- 06 Production
- 07 Components
- 08 Process & service



01 Carcase & board

Berco leads with a multi-layer plywood carcase and aluminium kickboards — strongest in bending, tightest against moisture, best screw-hold. MDF and particleboard cores are also offered: MDF for shaped or moulded fronts, particleboard as a value option.

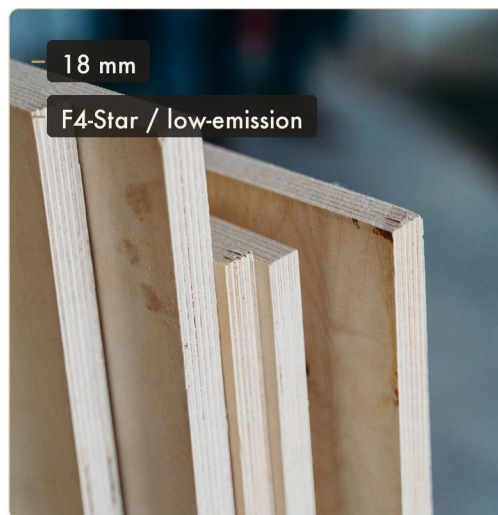

Multi-layer plywood carcase

● Our standard	11-layer plywood carcase, cross-bonded, with aluminium kickboards
Other materials	MDF core (shaped / moulded fronts) · particleboard core (value option)
Core adhesive	No-added-formaldehyde MDI on core boards
Emission	Low-emission grade per order — E1 / E0 / ENF

WHY WE LEAD WITH PLYWOOD

	Plywood (our standard)	MDF	Particleboard
Bending strength	≈26 MPa	≈24 MPa	≈11 MPa
Screw-hold, surface	≥900 N	≥900 N	≥900 N
Moisture swell, 24h	≤8%	≤35%	varies
Moisture resistance	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●

Supplier test data, shown as why Berco leads with plywood — a comparison, not a performance guarantee. Moisture-resistant, not waterproof.

02 Door fronts

Nine ways to face a door — chosen for the room, not only the look. Each is built differently; each carries an honest best-for.




Melamine

Schattdecor décor, PUR-sealed edge — the everyday workhorse.




PVC / film

MDF core, wrapped one piece; takes routed profiles.

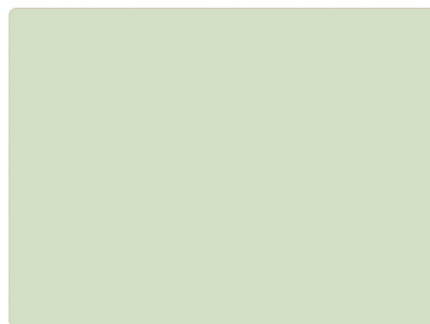

Baked lacquer

Sprayed on an ICA line; colour runs around the front.

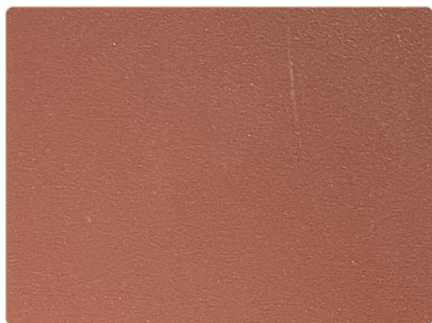


High-gloss UV

UV-cured, fully cured; bounces light into the room.




Powder coat

Six-sided VOC-free powder; a seamless coated edge.

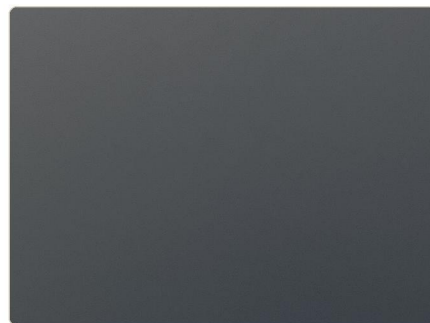

PET film

Recyclable matte film; low-glare, fingerprint-resistant.

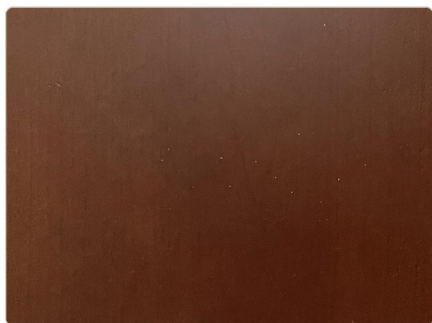


Wood veneer

Real timber — no two doors identical.



HPL

High-pressure laminate; tough, stone- and wood-look.

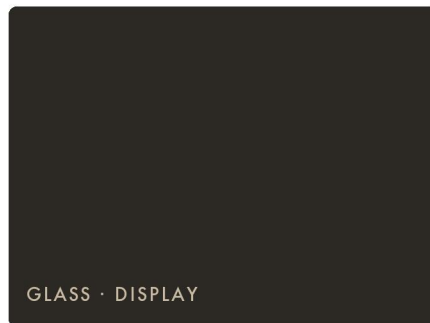


Aluminium-framed

Slim alloy frames for glass and display doors.

03 Edging

Four ways to finish an edge — every one a sealed, moisture-resistant seam.

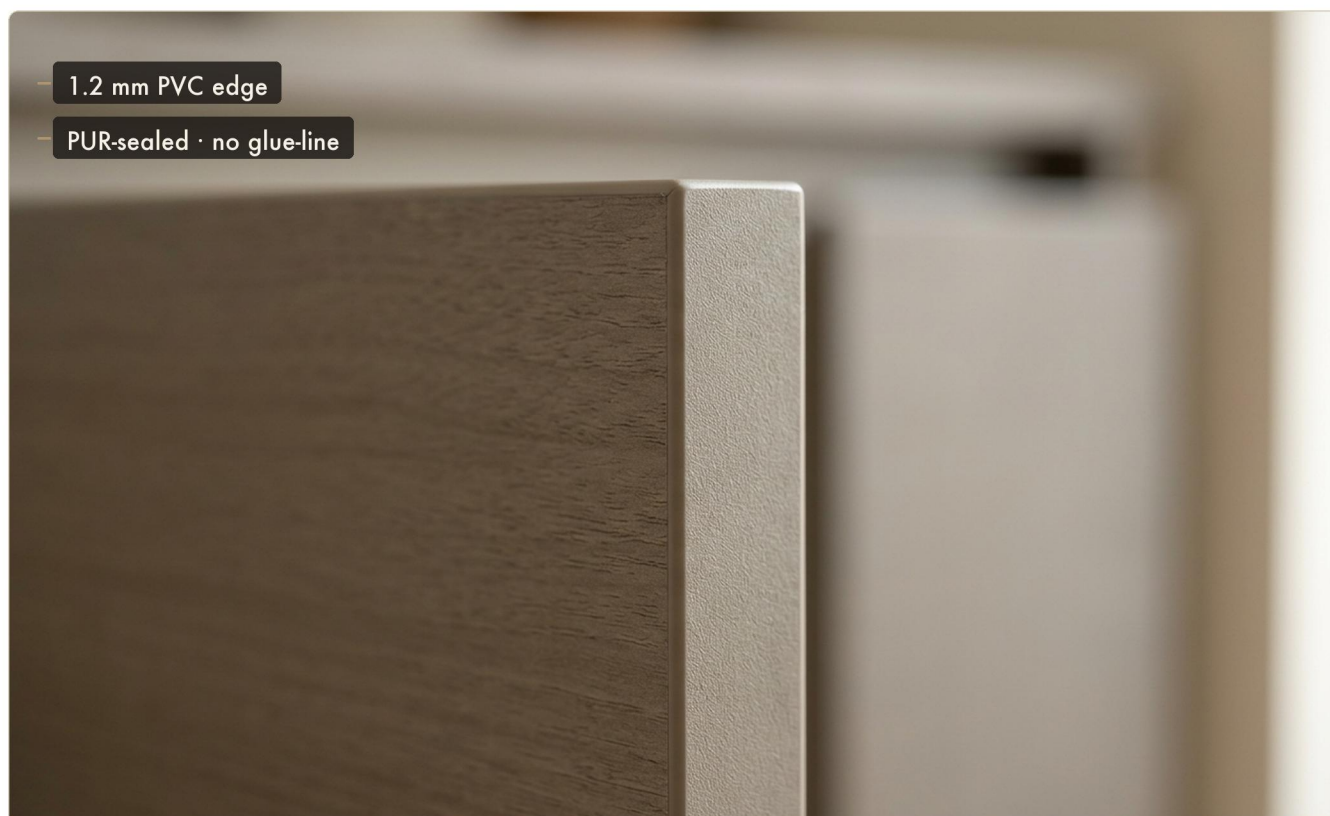

A PUR-sealed edge — the seam reads as one continuous surface

PUR-sealed

Rehau tape bonded with Jowat PUR on a Homag line — a tight seam, no black glue-line.

Chamfer

An inward bevel on fitted parts — smooth and safe, no sharp arris.

Laser zero-joint


A seamless edge with no glue line at all; the tape fuses to the panel.

Band-free

Lacquer, powder and wrapped PVC carry no edge band; the finish runs around the front.

Moisture-resistant, not waterproof.

04 Countertops

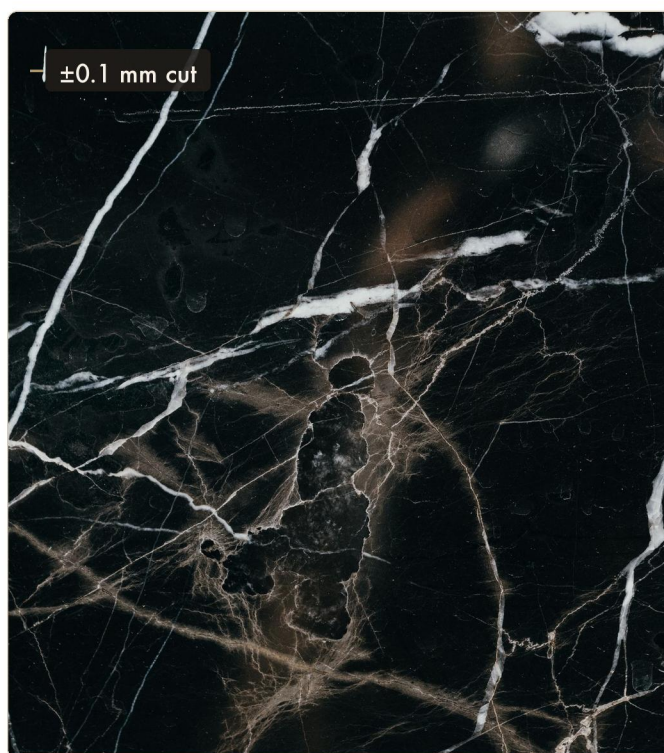

Quartz	Engineered stone, P1–P4 series, 20 mm. Dense, non-porous, stain-resistant.
Sintered stone	ES series, 12 mm and 20 mm. Ultra-hard, heat- and scratch-resistant.
Zero-silica quartz	An overseas-dedicated range. Silica dust is the real hazard in stone fabrication – a genuine, checkable difference.
Fabrication	Cut on imported CNC bridge and edging lines to ± 0.1 mm; CNC sink cut-outs, polished edges.

Care – heat-resistant, not heatproof: quartz resins soften around 150 °C / 300 °F. Use a trivet for hot pans.

05 Hardware

The named parts that make a Berco cabinet move, hold and last.



Concealed hinge

Blum · Hettich · Salice — soft-close, 3-way adjustment.



Press-to-open

Ejects a handleless front on a press. A release, not soft-close.



Wall anchor

fischer nylon (PA6) — humidity-resistant, finned grip.



Cam-and-dowel

Titus (UK) / Hettich (Germany) — a strong, tool-light joint.

Runners

Blum and Hettich full-extension with integrated soft-close — slim steel box sides (LEGRABOX) or concealed under-mount (Quadro).

Wall brackets

Patented surface bracket ≈50 kg each; Hettich concealed bracket ≈55 kg — hidden, doesn't eat carcass space.

In-cabinet power

Siemens surface-mounted socket track — sockets clip anywhere along the rail, each independently switched.

Soft-close is standard on every hinge and runner — not an upgrade.

06 Production & precision



Panel cutting CNC to ± 0.1 mm, software-optimised nesting.

Edging PUR and laser-sealed edges on Homag / IMA lines.

Drilling Automated CNC for consistent hole patterns and hardware fit.

Finishing UV-cured lacquer, VOC-free powder, and multi-coat spray lines.

Stone Italian / German CNC bridge cutting and edging to ± 0.1 mm.

Cut and finished on European lines to fine tolerances – then checked before it leaves.

07 Components

Berco cabinetry is built from named component brands. We cite only the ones actually used on a given project.

BOARDS & PANELS

EGGER (Austria) · Northwest Hardwoods (USA) · METRO / Masson (Thailand) · HeveaBoard (Malaysia)

ADHESIVES

Jowat (Germany) · Henkel (Germany) · Bostik (USA)

EDGING, DÉCOR & FILM

Rehau (Germany) · Schattdecor (Germany) · LamiGraf (Spain) · Alfatherm (Italy)

HARDWARE & FITTINGS

Blum (Austria) · Hettich (Germany) · Kesseböhmer (Germany) · Peka (Switzerland) · Salice (Italy) · Titus (UK) · fischer (Germany) · Siemens (Germany) · Higold

SURFACES & STONE

Silestone / TheSize (Spain) · Caesarstone (Israel) · BLANCO (Germany) · FeiYu workstation sinks

PAINTS

Sherwin-Williams (USA) · BASF (Germany) · ICA (Italy)

We name only what a project actually uses — never a brand we did not fit.

08 Process & service

01 Site assessment

We measure and understand the space and the brief.

02 Design

Layout, materials and hardware specified against this document.

03 Production

Cut and finished on European lines, then checked.

04 Installation

Fitted by our own team; national capability from two hubs.

Warranty and lead time are project-specific, confirmed in writing before anything is ordered.

